


RGT

HORIZONTALLY SLIDING FIRE DOOR FOR CONVEYOR OPENINGS.

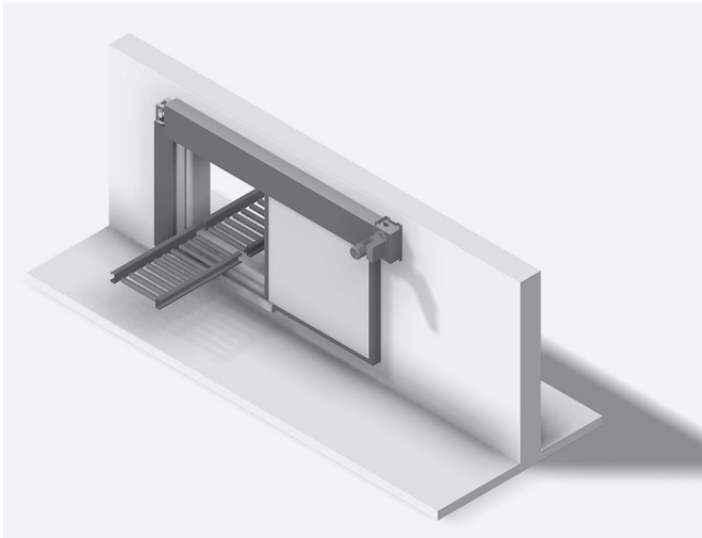

Product description

In the event of fire, the fire protection closure automatically closes a wall opening, through which conveyor lines (f.e.: interrupted or continuous Roll-, Belt- oder Carrying-Chain-Conveyors) are passing.

| | |
|--------------------------|--|
| Type | Horizontally sliding fire door for conveyor openings |
| Closing direction | From left to right, from right to left |
| Fire resistance | Up to 3 hour rated |
| Durability | N.a. for weightbalanced systems |
| Reopen | Motorised |
| Conveying Systems | Interrupted or continuous Roll-, Belt- oder Carrying-Chain-Conveyors |

Constructive system design (system drawing)

Type of Wall

Brick-Wall 8,5 In, Concrete-Wall, Masonry-Walls, Steel jamb Plates embedded in concrete or masonry walls – or equal value

Width of the Opening (decimal Inch):

width: 70,8 In, height: 84,6 In, area: 598,9 In²

